




Monocast GSM buckets

Monocast GSM elevator buckets are nylon cast, also containing molybdenum disulfide as an additive. The deep elevator bucket lends itself perfectly to the upward conveyance of glass, shards of glass, cement, sand, and other abrasive products. Two types of these abrasion-resistant elevator buckets are available:

- ✓ NBA series without edge reinforcement
- ✓ DIN series with edge reinforcement, in accordance with DIN 15234.

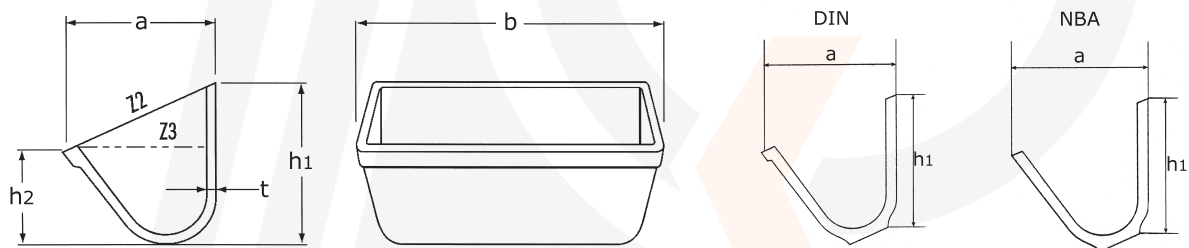

Monocast GSM elevator buckets NBA series (parameters in mm)

Type	Size/weight					KG	Volume		Max. bckts/m
	b	a	h1	h2	t		Z2	Z3	
NBA 8	206	111	127	73	8,0	0,59	1,20	0,98	5,6
NBA 10	254	123	141	82	8,0	0,79	1,85	1,44	5,2
NBA 12	318	167	164	93	8,0	1,13	4,50	2,70	5,0
NBA 14	362	179	190	109	8,0	1,53	6,10	4,00	4,1
NBA 15	370	206	223	131	8,0	1,80	8,57	5,76	3,6
NBA 16	413	210	203	113	8,0	1,81	9,30	5,60	4,0
NBA 18	457	198	229	143	8,0	2,50	11,10	7,50	3,5

Monocast GSM elevator buckets DIN series (parameters in mm)

Type	Size/weight					KG	Volume		Max. bckts/m
	B	A	H1	H2	T		Z2	Z3	
DIN 200/160	224	178	209	109	8,0	1,25	3,65	2,23	4,0
DIN 250/180	274	199	233	121	8,0	1,59	5,60	3,54	3,6
DIN 315/200	339	219	260	135	8,0	2,38	9,90	5,39	3,3
DIN 400/225	426	244	291	153	8,0	3,18	15,20	9,05	3,0
DIN 500/250	526	269	328	176	8,0	4,20	23,92	14,38	2,7
DIN 630/280	656	301	364	193	8,0	5,44	37,20	22,70	2,5
DIN 800/315	830	330	400	212	8,0	9,20	59,00	38,00	2,2
DIN1000/355	1.035	375	450	236	8,0	15,00	95,00	60,00	2,0

Z2 = gross volume in liters, Z3 = net volume in liters.

These elevator buckets have no holes, but those may be drilled according to the client's specifications.